

pressure relief valve, screw-in type (direct acting, adjustable)

RVDA-10.-.-0-..

CP-120-101-00

(subject to change)

BUCHER
hydraulics





SW 19 mm

SW 27 mm
(Anzugs-
Drehmoment:
48 - 54 Nm)

Aufnahme-
bohrung
C-10-2
siehe
Massblatt-Nr.:
IK-100-109-00

SW 8 mm

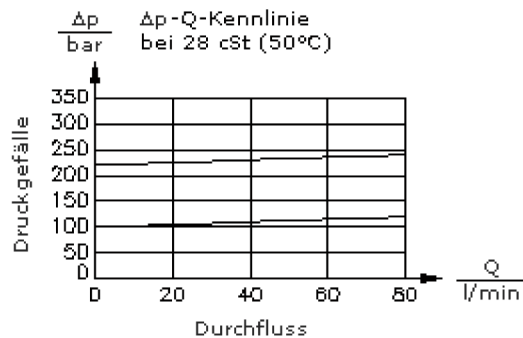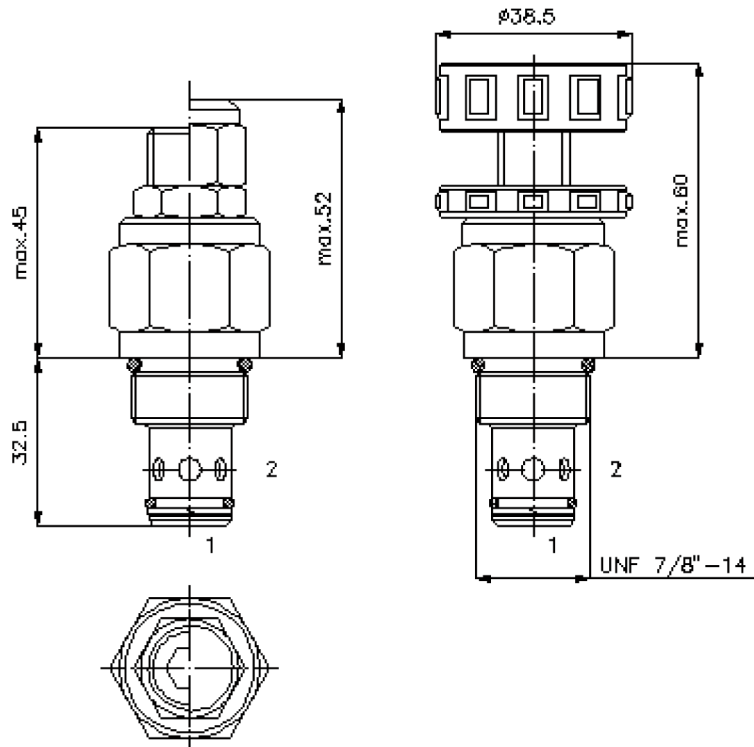

pressure relief valve, screw-in type (direct acting, adjustable)

RVDA-10.-.-0-..

BUCHER
hydraulics



Motrac Hydraulik GmbH
Siemensring 87 - D-47877 Willich
fon +49-(0)2154-8162.0 - fax +49-(0)2154-8162.499
e-mail info.miw@motracindustries.com
internet www.motracindustries.com

CP-120-101-00

(subject to change)

Ordering example:

RVDA - 10N - C - 0 - 30
| | | | |
A **B** **C** **D** **E**

Model code:

- | | |
|---|---|
| <p>A design
relief-valve
poppet type valve
direct acting</p> <p>B size and sealing
10N = Buna (NBR)
10V = Viton (FPM)</p> <p>C adjustment
S = screw adjustment
C = cap
K = handknob</p> | <p>D construction
0 = screw-in valve</p> <p>E pressure range
15 = 7.0 - 105 bar
30 = 21.0 - 210 bar
50 = 35.0 - 350 bar</p> |
|---|---|

Technical Data:

nominal pressure:	350 bar
nominal flow:	75 l/min
weight:	0.17 kg
temperature range:	-40°C to 120°C
fluids:	hydraulic oil as per DIN 51524 T1 (ISO TC 131)
max. leakage:	5 drops/min at 28.5 cSt (50°C) and 85% crack pressure
seals:	optional Buna (NBR) or Viton (FPM), as well as Teflon wascher (PTFE)
crack pressure:	adjustment will be determined at a flow of 0.25 l/min
cavity:	C-10-2 see datasheet no. IK-100-109-00
housing:	2LH-10.-B.. see datasheet no. IH-100-000-00
seal kit:	SP-CDS-10N-21 (NBR), SP-CDS-10V-21 (FPM)