
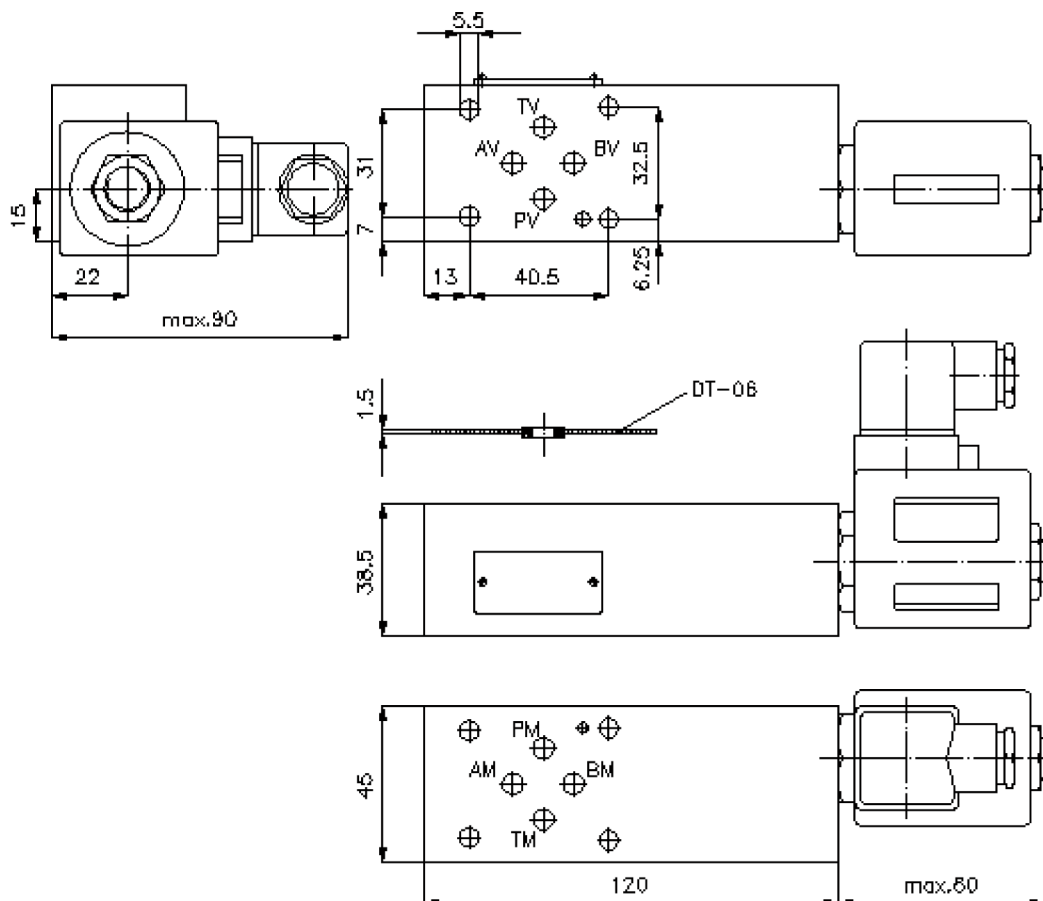


regeneration circuit plate CETOP 3 (sandwich plate)

DPSEZ-06S-B/.....

IZ-270-200-00

(subject to change)



regeneration circuit plate CETOP 3 (sandwich plate)

DPSEZ-06S-B/.....



Motrac Hydraulik GmbH
Siemensring 87 - D-47877 Willich
fon +49-(0)2154-8162.0 - fax +49-(0)2154-8162.499
e-mail info.miw@motracindustries.com
internet www.motracindustries.com

IZ-270-200-00

(subject to change)



Ordering example:

DPSEZ - 06S - B / 024D G H
| | | | | |
A **B** **C** **D** **E** **F**

Model code:

- | | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>A design
regeneration plate
with mounting interface DIN 24340 form A
sandwichplate design</p> <p>B size and material
06S = steel (9SMnPb28K resp. GGG-40)</p> <p>C function mode
B = in B acting</p> <p>D voltage
DC current:
012D = 12V DC
024D = 24V DC
AC current:
120A = 120V AC
240A = 240V AC
other voltage on request</p> | <p>E power supply
G = DIN 43650 connector, other
connectors see data sheet no.: MS-010-
000-00</p> <p>F function mode
H = high pressure variant only bei SV11-
10.-3-..</p> |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Technical Data:

- | | |
|--------------------------|-------------------------------------------------------------------------------|
| note: | port "A" must be connected with the bottom side of the cylinder. |
| nominal pressure: | 210 bar (SV1)
350 bar (SV11) |
| nominal flow: | 23 l/min |
| weight: | 1.7 kg |
| screw in valve: | solenoid valve: SV1-10.-3-.. see datasheet no. MS-510-099-00 |
| screw in valve: | solenoid valve: SV11-10.-3-.. see datasheet no. MS-510-101-00 |
| included: | DT-06 = sealing plate with vulcanized O-ring (Viton FPM) |