
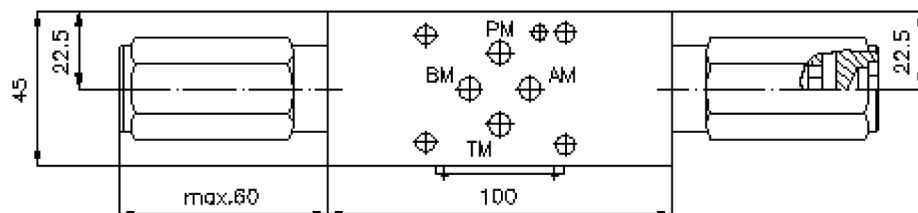
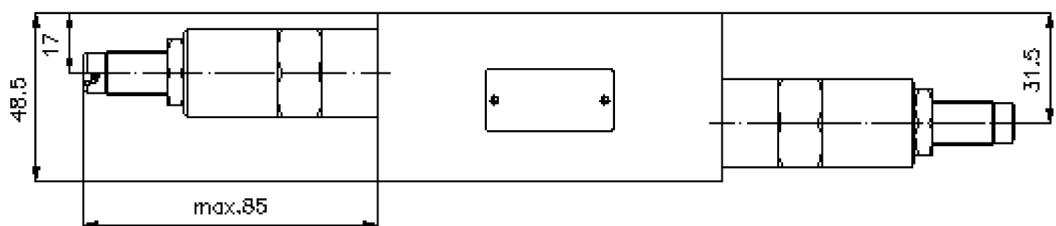

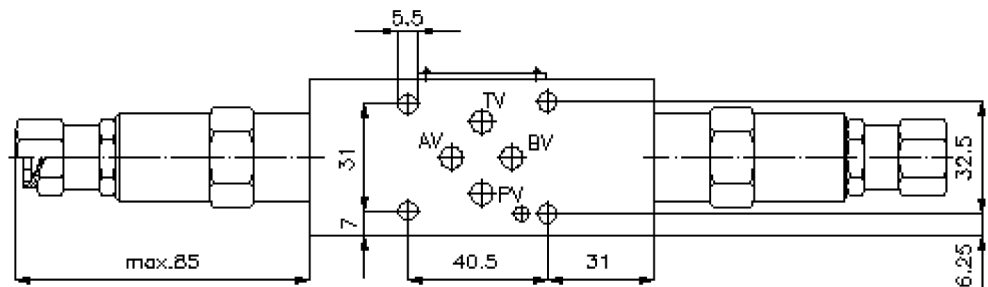


dual pressure relief valve, CETOP 3 ((sandwich plate) A to B + B to A) DDBVZ-06.-01./..



dual pressure relief valve, CETOP 3 ((sandwich plate) A to B + B to A)

DDBVZ-06.-01./..

IZ-425-200-00

(Änderungen vorbehalten)

Ordering example:

DDBVZ - 06A - 01 C / 18
| | | | |
A **B** **C** **D** **E**

Model code:

- | | |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>A design
bi-directional relief-valve
with mounting interface DIN 24340 form A
sandwichplate design</p> <p>B size and material
06A = aluminum (F37)
06S = steel (9SMnPb28K resp. GGG-40)</p> <p>C relief valve
01 = RV1-10.-.. (direct acting) see data
sheet no.: <u>MP-100-100-00</u>
03 = RV3-10.-.. (direct acting) see data
sheet no.: <u>MP-130-101-00</u>
06 = RV6-10.-.. (direct acting) see data
sheet no.: <u>MP-110-101-00</u>
08 = RV8-10.-.. (direct acting) see data
sheet no.: <u>MP-140-101-00</u>
10 = RV10-10.-.. (direct acting) see data
sheet no.: <u>MP-110-103-00</u></p> <p>D adjustment
J = internal (not for RV6 + RV10)
S = screw adjustment
C = cap</p> | <p>E pressure range
RV1-10.-..
03 = 3.5 - 20 bar
09 = 7.0 - 62 bar
18 = 17.0 - 124 bar
30 = 34.0 - 210 bar
36 = 34.0 - 250 bar
RV3-10.-..
03 = 3.4 - 21 bar
06 = 7.0 - 41 bar
09 = 14.0 - 62 bar
18 = 20.0 - 124 bar
36 = 41.0 - 250 bar
RV6-10.-..
25 = 3.4 - 175 bar
50 = 140.0 - 350 bar
RV8-10.-..
04 = 3.5 - 30 bar
12 = 7.0 - 86 bar
25 = 17.0 - 175 bar
50 = 38.0 - 350 bar
RV10.-..
02 = 1.7 - 17 bar
05 = 3.5 - 35 bar
10 = 17.0 - 70 bar</p> |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Technical Data:

nominal pressure:	250 bar (A) 350 bar (S)
nominal flow:	75 l/min
weight:	0.7 / 1.8 kg (A/S)
included:	DT-06 = sealing plate with vulcanized O-ring (Viton FPM)