
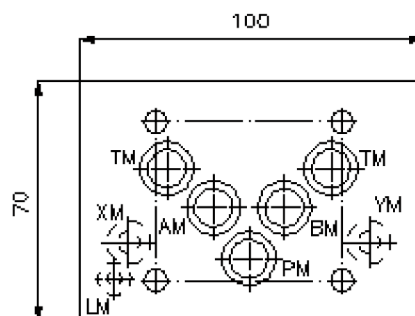
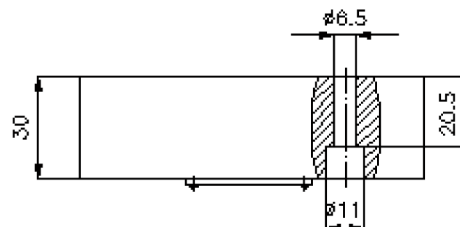
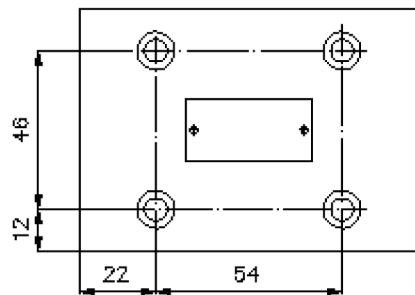


blanking plate CETOP 5 (P, T, A, B and L closed)

VSP-10.-L

IZ-850-410-00

(subject to change)



blanking plate CETOP 5 (P, T, A, B and L closed)

VSP-10.-L



Motrac Hydraulik GmbH
Siemensring 87 - D-47877 Willich
fon +49-(0)2154-8162.0 - fax +49-(0)2154-8162.499
e-mail info.miw@motracindustries.com
internet www.motracindustries.com

IZ-850-410-00

(subject to change)



Ordering example:

VSP - 10A - L
| | |
A **B** **C**

Model code:

- A design**
linking sandwich plate
with mounting interface DIN 24340 form A
- B size and material**
10A = aluminum (F37)
10S = steel (9SMnPb28K resp. GGG-40)
- C function mode**
L = with leakage hole

Technical Data:

- note:** required mounting screws:
4 pcs. M6 x 30 DIN 912
- nominal pressure:** 250 bar (A)
350 bar (S)
- weight:** 0.9 / 2.4 kg (A/S)
- included:** 5 pcs. O-Ring 12.42 x 1.78
1 pcs. O-Ring 6.07 x 1.78